

Installation Guide

Initial proxy server setup and configuration

- [APISIX Setup](#)
- [Vault Setup](#)
- [Configuration Installation](#)
- [Setting up AWS EC2 with Ubuntu, Docker, and a Public IP](#)

APISIX Setup

Finmars APISIX Setup Guide

Abstract

As result of that instruction you will have proxy to Exante Broker e.g. <https://exante-proxy.client.com> where client.com your domain

Prerequisites

Before starting make sure you have the following:

1. A machine running Linux with Ubuntu 22.04.
2. Docker installed on your machine.
3. A public IP address.
4. Generated API keys in Exante Account Page
5. You need to convert `API Key` and `Secret Key` to Basic Auth Token String (Use any public base64 encoder, in other words it should be `base64(api_key + ":" + secret_key)`)

Steps to Set Up APISIX

1. Run the APISIX Docker Container:

```
docker run -d --name apache-apisix -p 9080:9080 -p 9443:9443 -e  
APISIX_STAND_ALONE=true apache/apisix
```

2. Create the `apisix.yaml` Configuration File:

Create a file named `apisix.yaml` with your desired configuration.

3. Copy the `apisix.yaml` File to the APISIX Container:

```
docker cp apisix.yaml apache-apisix:/var/tmp/
```

4. Move the `apisix.yaml` File to the APISIX Configuration Directory:

```
docker exec -i apache-apisix sh -c 'cp /var/tmp/apisix.yaml /usr/local/apisix/conf/'
```

5. Reload the APISIX Configuration:

```
docker exec -it apache-apisix apisix reload
```

Setting Up HTTPS

If you want your APISIX instance to listen for HTTPS connections, follow these additional steps:

1. **Obtain an SSL Certificate:**

Get or create an SSL certificate and export it along with its private key to PEM format.

2. **Update `ssls.yaml`:**

Put the PEM contents into the corresponding sections of `ssls.yaml`.

3. **Include SSL Configuration in `apisix.yaml`:**

Add the contents of `ssls.yaml` to `apisix.yaml` before the `#END` instruction.

```
apisix:
  node_listen: 9080          # HTTP inbound port
  ssl:
    enable: true
    listen:
      - port: 9443           # HTTPS inbound port
        enable_http3: false

consumers:
  - username: finmars        # client name
    plugins:
      basic-auth:
        username: foo        # inbound credentials, that you will pass to Finmars IT Team
        password: bar

# upstream.yaml

upstreams:
  - id: 1
    nodes:
      api-demo.exante.eu:443: 1
    scheme: https
    pass_host: node
```

```
    type: roundrobin
- id: 2
  nodes:
    api-live.exante.eu:443: 1
  scheme: https
  pass_host: node
  type: roundrobin
```

```
# plugin_config.yaml
```

```
plugin_configs:
```

```
  - id: 1
    plugins:
      basic-auth: {}
      proxy-rewrite:
        headers:
          set: # credentials used to connect to api-demo.exante.eu # Basic Auth string from
API key and Secret Key
          Authorization: "Basic
NDQ3YTIxNzEtYWnkMi00N2Q0LWEyOWYtOTk4ZTA5YzQ2Njk00kJSUpEQk9NUGdXVmxpN2wyeDBW"
          regex_uri:
            - "^/demo/(.*)"
            - "/$1"
  - id: 2
    plugins:
      basic-auth: {}
      proxy-rewrite:
        headers:
          set: # credentials used to connect to api-live.exante.eu # Basic Auth string from
API key and Secret Key
          Authorization: "Basic
NDQ3YTIxNzEtYWnkMi00N2Q0LWEyOWYtOTk4ZTA5YzQ2Njk00kJSUpEQk9NUGdXVmxpN2wyeDBW"
          regex_uri:
            - "^/live/(.*)"
            - "/$1"
```

```
# routes.yaml
```

```

routes:
  - uris:
      - /demo/md/*/accounts
      - /demo/md/*/symbols/*
      - /demo/md/*/summary/*
      - /demo/md/*/ohlcv/*
      - /demo/md/*/transactions
      - /demo/trade/*/orders/*
    upstream_id: 1
    plugin_config_id: 1
  - uris:
      - /live/md/*/accounts
      - /live/md/*/symbols/*
      - /live/md/*/summary/*
      - /live/md/*/ohlcv/*
      - /live/md/*/transactions
      - /live/trade/*/orders/*
    upstream_id: 2
    plugin_config_id: 2
#END

```

Also part if you dont have nginx proxy

```

# ssls.yaml

ssls:
  - id: 1
    snis:
      - test.com          # hostname where apisix instance is running
    cert: |
      -----BEGIN CERTIFICATE-----
      MIICojCCAYoCCQDoby1LjeWcZzANBgkqhkiG9w0BAQsFADARMQ8wDQYDVQQDDAZS
      T09UQ0EwIBcNMjQwNzEyMjE1MjEzWhgPMjEyNDA2MTgyMTUyMTNaMBMxETAPBgNV
      BAMMCHRlc3QuY29tMIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAs5Y
      uQvVwF3CFbNlJPK8007QlKA8UuapWdSKgT59Vqnkk0/7dfUHfP6p0FG8kxQexZBG

```

uxbID+nCM175pJyjXjd2mZngtj2E1l3vUH0H6hhE0o5xLAgrDbBxgHnMZHyh/4xz
quXgho0nv1R0i+0cIou4viyDp4BslyBJU0NskEih0yUTJaSUS6zR6Q1aABEVEgYi
0F9Wyr2tJ58jTlrRvFgrsDXe0oyf81diAmWePg4mETanejbaDBhtCQH8PlLFfU1b
TeqqZXRAdE0kbV23o4BfPYPB73Px1bdo0u/wGZTTY2DKQwd9QPg8fg0dT8dvegke
3dUUx/XozqekMt3w2QIDAQABMA0GCSqGSIb3DQEBcwUAA4IBAQAAnBUBhEnk2zjP5
P9AJ/2cwfrQSBj/Bti5vW/xAAEAwx0Wqpccdsenr9/T8D4n1g5SZJeXhmRWdvSdB
pYbUr0a4ISjpvotxe4dC0hQo2E09XupQZPKbioyZTWJczwgxmccdkLH8uJD2lLz
e/JKVfFH7Ax09Cz9I3+oyfEehPjemb5dJg/HQa+nWCC7ic7tC4mvd72GyGqAub4e
omhzWfmSsDxQpmJauA6uW0swfH+Ws+id6YhwArsxgMYcwURQ6L1YeaXKs3kTRnrN
9XV0Tt1N0QaHPlBo4kGDujJ+aCfH9bReFbwa1CV6nS6wDqXu0SWEkKa69hXI3Wzp
gv0mZ+28

-----END CERTIFICATE-----

key: |

-----BEGIN RSA PRIVATE KEY-----

MIIEpAIBAAKCAQEAzs5YuQvVwF3CFbNlJPk8007QlKA8UuapWdSKgT59Vqnkk0/7
dfUHfP6p0FG8kxQexZBGuxbID+nCM175pJyjXjd2mZngtj2E1l3vUH0H6hhE0o5x
LAgrDbBxgHnMZHyh/4xzquXgho0nv1R0i+0cIou4viyDp4BslyBJU0NskEih0yUT
JaSUS6zR6Q1aABEVEgYi0F9Wyr2tJ58jTlrRvFgrsDXe0oyf81diAmWePg4mETan
ejbaDBhtCQH8PlLFfU1bTeqqZXRAdE0kbV23o4BfPYPB73Px1bdo0u/wGZTTY2DK
Qwd9QPg8fg0dT8dvegke3dUUx/XozqekMt3w2QIDAQABAoIBAHZaPQhZr5CRL7tX
mXDZeg+TDKeiNC01ggG40zM4Ef8A56EuytgszIZKL4ndrS/2+c1SzkfPt9rzioJf
vjrosc3/q84n9CQXf0g5hfXiyEu+a9ScVERAwHLrIWnHSqPPd96KAMaZIpWePrs0
mExejEJw9990FmJL6th8PHkgTkcbYRKv8K7WnNDIHdUK6iSg0rtyvg2YDgRDDiRv
GS3ofHd05WxQsrqxYdle8aThuKV31gjt3nlfDNinWKHGEmvXbSGu7HGCK61NlK+j
py3lkTZLeoxVaoZ5fIjdA/a0WDgv9HQBxtiCjd4VGC6xAsLT9gBy9c6cJFdb52Nc
w/jjn6ECgYEA/gx6UrCcp2TuZYU/xkEIMi6mVe7d60w7672pK6FxcNrBiV0T/+F1
o2Cwd0iq0X9IJkBLDIGM2fFTPtIER60f8P/RnfzLX7Gen0X+voR9zpYePuyIKaf
UW6n4ZB4wlt7ZIoRwTAwo/Whhx+XGL4iVosw2DI6tFXRWI0+8dCew0CgYEA0GT6
Xp0yi/D9UjZ1vM/fpojBzh6gZaK6zQjWi5CrcMzC2FyD0K9BTS2BWe28gmgV2Sab
9/fZJmXnpAnleiI2Co8b4p+44QAPtPUPCsIAiVR0S1vaEv/S+0ag682jDFWn0R5C
VYSg4hyC0f3KA0Jb9mgL/B/vFEnq1YBEr3P6af0CgYEAqeF0Kt104+DqSZjA/KGg
CW6IbA4+94kSyKEa7sIWSZD+ugwzw3fQYl/Vn1e2YkDqzilQBhzbQyHMuMreRhRy
Pr2hhk3P5LfRoTCLAJkYSmoJn10v0AWbo6iL0pqRJeZmr0Rm2vi0jhVC3kiRkUoT
TCvnjap3DV7PL0Zu565nFkECgYEAAtVC2Wi3RtdqWvboulHoU8H0w2Nga3HNKrmxb
JxFXaQxvFwrfDSnG2lyWZ+UmGBxxrf8ewxA90mB9u8cCcyJi/KrpKz0nCvUftWV9
MSpLYXEdsgmX4uH88q3QA3pmu6umlFbUhk2gITuGvugmosBQHUMH8nTicjeh/+Lb
YAC7xw0CgYA8rePgM3xCn5U7zZPbvraYa7UZKvmrBAJpnh+oaYVpF4B1SCVJL23V
Ym/vXKzR3K0Q8eKiU0UTV23CeZ1CSiDeDS5Y3yjVmfbABxlgmF/Z4kuvfTpk2Lns

```
AjX3slshjCQjfNtVfelqXW+9QDyZbDZpNs5Cfl8/awj0+Mwv/isxVA==
```

```
-----END RSA PRIVATE KEY-----
```

How To Test

Make a CURL request to APISIX proxy

```
curl -u foo:bar 0.0.0.0:9080/demo/md/3.0/accounts
```

or open `0.0.0.0:9080/demo/md/3.0/accounts` in browser and pass Basic Auth Credentials

Get help

- APISIX Documentation [<https://apisix.apache.org/docs/apisix/getting-started/README/>]
- Exante Documentation [<https://api-live.exante.eu/api-docs/>]
- Finmars IT Help: s.zhitenev@finmars.com

Vault Setup

Connecting Vault

Currently performed by a Finmars employee at the client's request.

Initializing Vault

Prerequisites

- A created database with an activated license

Actions

1. Go to `Settings -> Vault`
2. Activate Vault and save the secret keys.
Do not lose these keys, as they cannot be recovered. If the keys are lost, the data saved in the Vault will be lost.
3. Inform the Finmars employee of the Vault token

Unseal Vault

Prerequisites

- A created database with an activated license
- Vault initialized

Actions

1. Go to `Settings -> Vault`
2. Click the Unseal Vault button
3. Enter the three keys one by one

Adding Access to Proxy Server

Prerequisites

- A created database with an activated license
- Vault initialized
- Vault unsealed
- Proxy Server deployed

Actions

1. Go to `Settings -> Vault`
2. Click the `Add Engine` button
3. Enter the name `finmars`
4. Click the `Add Secret` button
5. Add the following `json` content:

```
{
  "data_url": "{url_to_proxy_server}/md/3.0/",
  "trading_url": "{url_to_proxy_server}/trade/3.0/",
  "api_key": "foo",
  "secret_key": "bar"
}
```

- `data_url` - URL to the proxy server's information endpoint specifying the API version - example `https://demo-exante.finmars.com/demo/md/3.0/`
 - `trading_url` - URL to the proxy server's trading endpoint (required for enriching transaction information with orders) specifying the API version - example `https://demo-exante.finmars.com/demo/trade/3.0/`
 - `api_key`, `secret_key` - credentials for `basic auth` to the proxy server
7. Click the "Save" button

Configuration Installation


Installing Modules

Prerequisites

- A created database with an activated license

Actions

1. Go to `Settings -> Configuration -> Marketplace`
2. Select the `Standard Configuration` package and install it by clicking the install button

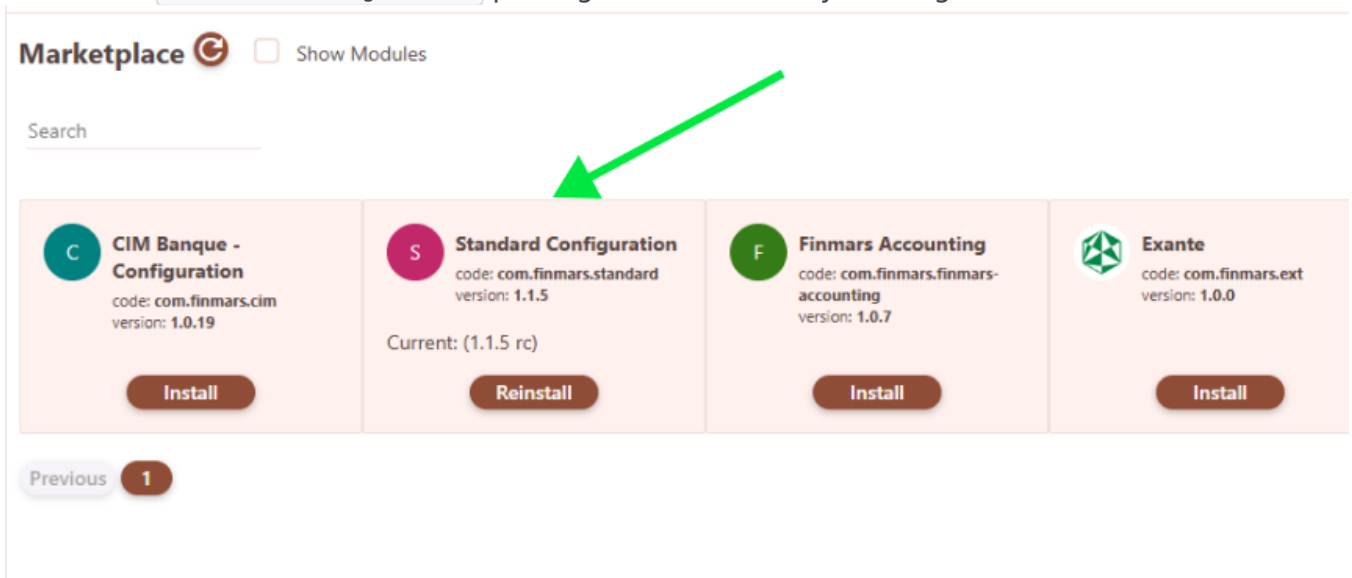

3. Wait for the module installation to complete

4. You can check the success of the module installation in the **Data -> Tasks** section. All tasks should be completed. Completion is indicated by a brown rectangle.

Finmars

Master Finance

Dashboard

Home

Reports

Data

Transactions

Valuations

Import

Reconciliation

Tasks

Date From: 2024-06-18

Date To: 2024-07-18

Search

Status

Task type

Result

Stats

Configure

Worker: celery@worker01
Uptime: 79:54:54
Memory consumed: 243.4375 MB

Worker: celery@worker00
Uptime: 37:58:13
Memory consumed: 171.55078125 MB

Worker: meta
Uptime: aNaNaN
Memory consumed: NaN MB

Status	Result	Date	Task	User
	Errors: Skip: Success:	2024-07-15	Configuration Import [21]	apetrushkin
	Errors: Skip: Success:	2024-07-15	Configuration Import [20]	apetrushkin
	Errors: Skip: Success:	2024-07-15	Configuration Import [19]	apetrushkin
	Errors: Skip: Success:	2024-07-15	Configuration Import [18]	apetrushkin
	Errors: Skip: Success:	2024-07-15	Configuration Import [17]	apetrushkin
	Errors: Skip: Success:	2024-07-15	Configuration Import [16]	apetrushkin
	Errors: Skip: Success:	2024-07-15	Configuration Import [15]	apetrushkin
	Errors: Skip: Success:	2024-07-15	Configuration Import [14]	apetrushkin
	Errors: Skip: Success:	2024-07-15	Configuration Import [13]	apetrushkin
	Errors: 0 Skip: 0 Success: 0	2024-07-15	Install Configuration From Marketplace [12]	apetrushkin

Journal

Setting up AWS EC2 with Ubuntu, Docker, and a Public IP

Follow these steps to quickly set up a basic server environment on Amazon Cloud (AWS).

Step 1: Log in to AWS Console

- Visit <https://console.aws.amazon.com>
- Log in using your AWS account credentials.

Step 2: Create an EC2 Instance

- From the AWS console, search for and select **EC2**.
- In the EC2 Dashboard, click **Instances** → **Launch instances**.

Step 3: Select Ubuntu Server

- Under **Name and tags**, give your server a recognizable name (e.g., "MyUbuntuServer").
- Under **Application and OS Images (Amazon Machine Image)**, select **Ubuntu Server 22.04 LTS**. (or 24.04 LTS)
- Leave other settings at default unless instructed otherwise.

Step 4: Configure Security Settings

- Under **Network settings**, select **Create security group**.
- Ensure that at least the following ports are allowed:
 - **SSH (22)** for secure access to your server.
 - Add custom rules if needed, for example:
 - HTTP (80)
 - HTTPS (443)
- Click **Launch instance**.

Step 5: Connect to Your Instance

- After your instance launches, click on its name to see details.
- Locate the **Public IPv4 address**; this is your public IP address.

Step 6: Access Your Instance via SSH

- Open your terminal or command prompt.
- Connect using SSH (replace your-key.pem with the path to your downloaded AWS key file, and public-ip-address with your actual public IP):

```
chmod 400 your-key.pem
ssh -i your-key.pem ubuntu@public-ip-address
```

Step 7: Install Docker on Ubuntu

Follow [Ubuntu | Docker Docs](#)

You're all set!

You now have:

- Ubuntu Server 22.04 running on AWS
- Docker installed
- A public IP address to access your server remotely

Secure Base64 Encoding via Linux Console

Step 1: Open your Linux terminal.

Step 2: Execute the following command (replace `api_key` and `secret_key` with your real keys):

```
echo -n "api_key:secret_key" | base64
```

Example:

If your keys are:

- API Key: abc123
- Secret Key: xyz789

Then run:

```
echo -n "abc123:xyz789" | base64
```

Output will look like:

```
YWJjMTIzOnh5ejc4OQ==
```

How it works securely:

- `echo -n` prevents adding a newline at the end of the text, which ensures correct encoding.
- `base64` is a built-in utility that encodes the data right on your system without internet exposure.

You can then safely use this encoded string as your Basic Auth token:

Authorization: Basic YWJjMTIzOnh5ejc4OQ==